


include/beecrypt/hmacmd5.h

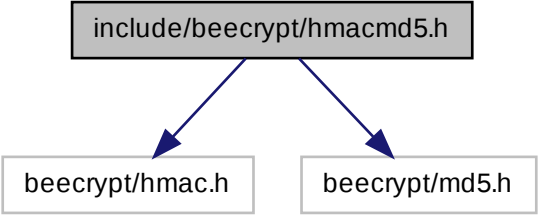

```
graph TD; A[include/beecrypt/hmacmd5.h] --> B[beecrypt/hmac.h]; A --> C[beecrypt/md5.h];
```

The diagram illustrates a header file inclusion structure. At the top, a grey rectangular box contains the text 'include/beecrypt/hmacmd5.h'. Two blue arrows originate from the bottom edge of this box. The left arrow points to a white rectangular box containing 'beecrypt/hmac.h'. The right arrow points to another white rectangular box containing 'beecrypt/md5.h'. This visualizes that the 'include/beecrypt/hmacmd5.h' file includes both 'beecrypt/hmac.h' and 'beecrypt/md5.h'.

beecrypt/hmac.h

beecrypt/md5.h