


include/beecrypt/mp.h

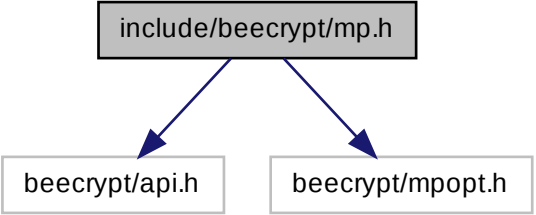

```
graph TD; A[include/beecrypt/mp.h] --> B[beecrypt/api.h]; A --> C[beecrypt/mpopt.h];
```

The diagram illustrates a header file dependency. A central box at the top, labeled 'include/beecrypt/mp.h', has two arrows pointing downwards to two separate boxes below it. The left box is labeled 'beecrypt/api.h' and the right box is labeled 'beecrypt/mpopt.h'. The top box has a grey background, while the bottom boxes have white backgrounds.

beecrypt/api.h

beecrypt/mpopt.h