


include/beecrypt/sha1opt.h

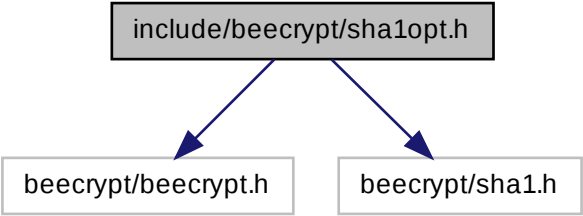

```
graph TD; A[include/beecrypt/sha1opt.h] --> B[beecrypt/beecrypt.h]; A --> C[beecrypt/sha1.h]
```

The diagram illustrates a header file inclusion structure. At the top, a gray box contains the text 'include/beecrypt/sha1opt.h'. Two blue arrows originate from the bottom of this box and point downwards to two separate white boxes. The left box contains 'beecrypt/beecrypt.h' and the right box contains 'beecrypt/sha1.h'. This visualizes that 'include/beecrypt/sha1opt.h' includes both 'beecrypt/beecrypt.h' and 'beecrypt/sha1.h'.

beecrypt/beecrypt.h

beecrypt/sha1.h